

Ô|æÓ| À) çã[ ] { ^} æ  
 FHÍ ÁÇãã } Á æ ÁF  
 Y æ [ ] çã| ^ÉÖÇÁÍ €í Î  
 ì HFË G ÈFH ï Á

# Aerating Fountain

## 5HP, 240V, Single Phase



### Operation

- ⇒ Submersed motor with top intake draws water into the fountain housing and pushes the water past the deflector disc and into the air.
- ⇒ Individual water droplets absorb oxygen from the atmosphere and return to the body of water transferring oxygen from the air and into the water.
- ⇒ Moving water mixes and agitates the water, spreading oxygenated water throughout the body of water.
- ⇒ Single propeller and deflector disc design allows for greater water flow with a lower likelihood of clogging.
- ⇒ Coated stainless steel bottom screen with 84 vertical bars with less than 1" gaps shall catch large debris and assist in reducing the likelihood of clogging while allowing for maximum water flow into the unit.

### Quick Facts

- ⇒ Complete Package includes Assembled Motor Unit, Power Control Panel, UV Resistant High Density Thermoplastic Float, Three 50' Braided Nylon Mooring Lines, and SJTOW Rated 3 Wire Power Cable
- ⇒ Operates in 26" (66cm) of Water
- ⇒ Total Package Listed by ETL to meet UL and CSA Standards for Safety in Water
- ⇒ Sacrificial Zinc Anode Installed for Corrosion Protection and use in Salt Water Applications
- ⇒ Series 300 Austenitic Stainless Steel Construction of Exposed Metal; Salt Water Compatible
- ⇒ 3 Year Warranty
- ⇒ UPS Shippable
- ⇒ Power Cable Potted Quick Disconnect on 12, 10, and 8 Gauge Cord Options with Stainless Steel Strain Relief
- ⇒ Optional Low Voltage Lighting Package with 3 Machined Bronze Fixtures, Thermal Overload Protection, and 3 Internal Seals
- ⇒ Two Light Sets per Fountain can be used with Additional Brackets
- ⇒ Energy Efficient with Excellent GPM/kW Rates
- ⇒ Industrial Strength Design
- ⇒ Top Intake for Shallow Water Operation
- ⇒ Bottom Screen with 84 Vertical Screening Bars with Less Than 1" Gaps to

Single "V" Shape  
Pattern 9' H x 34' W

### Features

#### Motor Unit

- ⇒ 5HP, 240V, Single Phase
- ⇒ 1750 RPM Motor
- ⇒ Oil Cooled, Continuous Duty Rated
- ⇒ Two Long Life Bearings
- ⇒ Thermal Overload Protection
- ⇒ Fully Unitized Heavy Duty Silicon Carbide Mechanical Seal
- ⇒ Series 300 Austenitic Stainless Housing with Engineering Grade Thermoplastic Top

#### Float

- ⇒ UV Resistant High Density Thermoplastic
- ⇒ 3-Piece Tongue and Groove
- ⇒ Protective Coated Series 300 Stainless Steel Hardware
- ⇒ Protective Coated, 300 Series Stainless Steel Top and Bottom Screens; 84 Vertical Screening Bars w/ Gaps Tapered from .875" to .188" on Bottom Screen
- ⇒ Three 50' Braided Nylon Mooring Ropes

#### Power Cable

- ⇒ UQQY UL, CSA, & NEC Approved Underwater Rated Cable
- ⇒ 3 Wire
- ⇒ Available in 100', 150', 200', 250', 300', or 400' (500' special order) Options (Cord Gauges depend on length)
- ⇒ Potted Quick Disconnect and Stainless Steel Strain Relief Standard on 12 Gauge and Larger Cords
- ⇒ 6' Flex Sleeve Protection

#### Control Panel

- ⇒ U.L. Listed Industrial Controller
- ⇒ 30 Amp Double Pole Square D® Class A Human Rated GFCB
- ⇒ Surge Protector
- ⇒ 120V GFI Protected Outlet for Lights
- ⇒ Photo Cell for Light Kit
- ⇒ NEMA Type 3R Weatherproof Steel Enclosure
- ⇒ 24 Hour Mechanical Timer

#### Fountain Components

- ⇒ 3 Blade Engineered Thermoplastic Propeller with Series 300 Stainless Steel Insert and All Blades on the Same Plane
- ⇒ UV Resistant Thermoplastic Draft Tube and Fountain Disc with Series 300 Stainless Steel Hardware

#### Optional Lights

- ⇒ 3 Machined Bronze Fixtures
- ⇒ 12V, 50W MR-16 Bulbs
- ⇒ Thermal Overload Protection
- ⇒ Triple Sealed
- ⇒ ETL Approved for Floating Fountains; UL-676
- ⇒ Optional brackets for adding 2 light sets

## Specifications

Model #	HP	Cord Length	Cord Gauge*	Voltage/Phase/Hz	Running Amps	Lock Rotor Amps	Sugg. Pond Size (SA)**	Min. Depth of Operation	Shipping Weight	Number of Boxes
5.1VFX100	5	100'	12/3	240/1/60	20	97	Up to 2.5	26"	179 Lbs.	4
5.1VFX150	5	150'	10/3	240/1/60	20	97	Up to 2.5	26"	200 Lbs.	4
5.1VFX200	5	200'	10/3	240/1/60	20	97	Up to 2.5	26"	215 Lbs.	4
5.1VFX250	5	250'	8/3	240/1/60	20	97	Up to 2.5	26"	290 Lbs.	4
5.1VFX300	5	300'	6/3	240/1/60	20	97	Up to 2.5	26"	365 Lbs.	4
5.1VFX400	5	400'	6/3	240/1/60	20	97	Up to 2.5	26"	446 Lbs.	4

\* 12 AWG and larger cords include potted quick disconnect and stainless steel strain relief.

\*\* Surface acreage (SA) is determined by multiplying length x width of the pond. The actual shape, depth, and oxygen demand should be considered when selecting a unit size.


## Optional Light Package Specifications

Model #	Cord Length	Number of Fixtures	Voltage/Phase/Hz	Wattage Per Fixture	Total Wattage	Lens Position	Shipping Weight	Number of Boxes
LR375100	100'	3	12/1/60	75	225	Above Water	24 Lbs.	1
LR375150	150'	3	12/1/60	75	225	Above Water	28 Lbs.	1
LR375200	200'	3	12/1/60	75	225	Above Water	31 Lbs.	1
LR375250	250'	3	12/1/60	75	225	Above Water	35 Lbs.	1
LR375300	300'	3	12/1/60	75	225	Above Water	38 Lbs.	1
LR375400	400'	3	12/1/60	75	225	Above Water	56 Lbs.	1


Light Kits include a built in, remote Low Voltage Transformer.



The Optional Lighting Package easily mounts to the float and can be purchased and added at any time. ETL approved for Floating Fountains; UL-676.



During unit operation, water is circulated from 360° around the unit as well as from below. Top intake for shallow water operation.

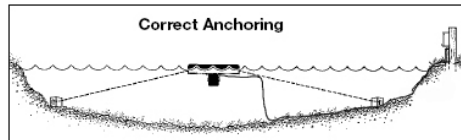

Each unit includes a UL Approved Control Panel complete with Class A Human Rated GFCI Protection, 24 Hour Mechanical Timer, and Photo Eye for Optional Light Kit. NEMA Type 3R weatherproof enclosure. 5.1VFX must be hard-wired into control panel.



The motor unit attaches to the float using stainless steel hardware for a secure assembly. The single section, U.V. resistant, high density thermoplastic float allows for excellent durability with an attractive shape and low visibility. The rigid bottom screen help protect the unit from debris and reduce the likelihood of clogging.

